



THREAD ROLLING TYPE [DT]

※GRAPHIC SYMBOL



DT

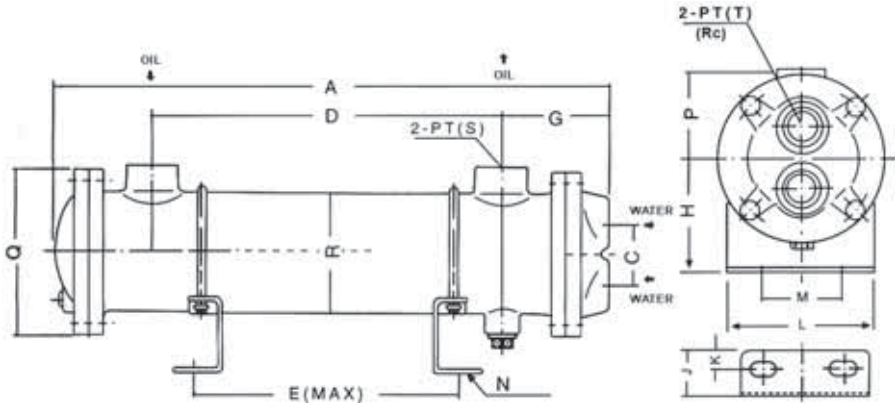


※SPECIFICATION


UNIT: M.M.(INCHES)

MODEL	A	C	D	E	G	H	J	K	L	M	N	P	Q	R	S (Rc)	T (Rc)	Max. Flow ℓ/min(GPM)	Cooling Area (m ²)	Weight (Kg)
DT-303	299(11.77)		147(5.79)	117(4.61)														0.3	8
DT-304	370(14.57)		219(8.62)	189(7.44)														0.4	9
DT-305	468(18.43)	48	291(11.46)	261(10.28)	95	79	35	15	128	75	11×20	75	120	89	1"	3/4"	100	0.5	10
DT-307	608(23.94)	(1.89)	435(17.13)	465(18.31)	(3.74)	(3.11)	(1.38)	(0.59)	(5.04)	(2.95)	(0.43×0.79)	(2.95)	(4.72)	(3.50)			(26.4)	0.7	12
DT-309	758(29.84)		578(22.76)	548(21.57)														0.9	13
DT-311	898(35.35)		722(28.43)	692(27.24)														1.1	14
DT-411	620(24.41)		425(16.73)	384(15.12)														1.1	16
DT-415	770(30.31)		568(22.36)	528(20.79)														1.5	18
DT-418	910(35.83)	70	712(28.03)	672(26.46)	100	88	35	15	150	105	11×20	93	140	114	1-1/4"	3/4"	200	1.8	20
DT-421	1055(41.54)	(2.76)	856(33.70)	816(32.13)	(3.94)	(3.46)	(1.38)	(0.59)	(5.91)	(4.13)	(0.43×0.79)	(3.66)	(5.51)	(4.49)			(52.8)	2.1	25
DT-424	1220(48.03)		1020(40.16)	980(38.58)														2.4	30
DT-522	785(30.91)		558(21.97)	528(20.79)														2.2	27
DT-527	925(36.42)		702(27.64)	672(26.46)														2.7	32
DT-531	1070(42.13)	85	846(33.31)	816(32.13)	115	95	45	20	175	122	14×22	108	170	139	1-1/2"	3/4"	300	3.1	37
DT-535	1235(48.62)	(3.35)	1010(39.76)	980(38.58)	(4.53)	(3.74)	(1.77)	(0.79)	(6.69)	(4.80)	(0.55×0.87)	(4.25)	(6.69)	(5.47)			(79.3)	3.5	47
DT-544	1455(57.28)		1228(48.35)	1198(47.09)														4.4	55
DT-649	1078(42.44)		836(32.91)	796(29.76)														4.9	40
DT-657	1242(49.90)	85	1000(39.37)	920(36.22)	125	105	45	20	204	149	14×22	121	196	165	2"	1"	400	5.7	46
DT-668	1462(57.56)	(3.35)	1218(47.95)	1138(44.80)	(4.92)	(4.13)	(1.77)	(0.79)	(8.03)	(5.87)	(0.55×0.87)	(4.76)	(7.72)	(6.50)			(105.6)	6.8	55
DT-682	1742(68.58)		1500(59.06)	1420(55.91)														8.2	60
DT-8107	1140(44.88)		825(32.48)	760(29.92)														10.7	8
DT-8125	1305(51.38)	110	990(38.98)	1025(40.35)	130	215	40	20	200	155	14	145	270	216	2"	1-1/4"	600	12.5	12
DT-8149	1520(59.84)	(4.33)	1210(47.64)	1130(44.49)	(5.12)	(8.46)	(1.57)	(0.79)	(7.87)	(6.10)	(0.55)	(5.71)	(10.62)	(8.50)			(158.5)	14.9	15
DT-8080	1805(71.06)		1490(58.66)	1420(55.91)														18.0	22
DT-10169	1100(43.41)		800(31.50)	725(28.54)														16.9	30
DT-10185	1210(47.64)		910(35.83)	835(32.87)														18.5	35
DT-10197	1300(51.18)	173	980(38.58)	905(35.63)	150	222	38	15	210	152	14	223	293	267	2"	10KV 2-1/2" Flange	800	19.7	50
DT-10235	1500(59.01)	(6.81)	1200(47.24)	1125(44.29)	(5.91)	(8.74)	(1.50)	(0.59)	(8.27)	(5.98)	(0.55)	(8.78)	(11.54)	(10.51)			(211.3)	23.5	60
DT-10285	1775(69.88)		1500(59.01)	1425(56.10)														28.5	70

※PERFORMANCE CURVE

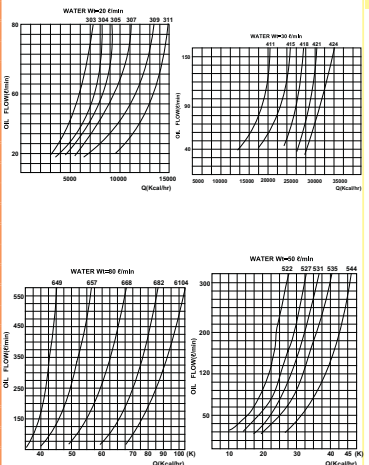

OIL COOLERS [HS]

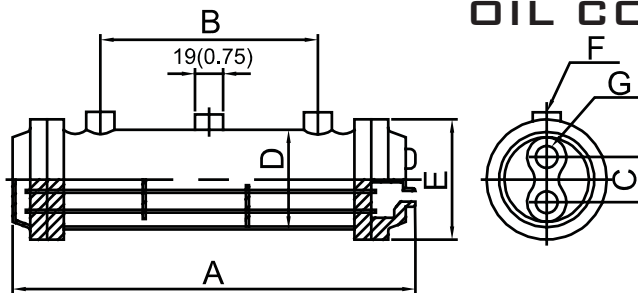

※SPECIFICATION

UNIT: M.M.(INCHES)

Model	A	B	C	D	E	F PT/Rc	G PT/Rc	Cooling Tube	Cooling Area (m ²)	Tank Capacity ℓ(GPM)	Weight (Kg)	Pump Flow ℓ/min(GPM)	Water Flow ℓ/min(GPM)
HS-0905	465(18.30)	295(11.61)	40(1.57)	89.1(3.51)	120(4.72)	3/4"	3/4"	22	0.24	60	8	100(26.4)	60(15.9)
HS-0908	540(21.26)	370(14.47)	55(2.17)	114.3(4.50)	140(5.51)	3/4"	3/4"	26	0.35	100	12	200(52.8)	100(26.4)
HS-1405	580(22.83)	375(14.76)	65(2.56)	139.8(5.50)	170(6.69)	1-1/4"	3/4"	42	0.6	150	15	300(79.3)	150(39.6)
HS-1408	800(31.50)	600(23.62)	65(2.56)	139.8(5.50)	170(6.69)	1-1/4"	3/4"	58	1.2	250	22	300(79.3)	150(39.6)
HS-1412	1205(47.44)	1000(39.37)	65(2.56)	139.8(5.50)	170(6.69)	1-1/4"	3/4"	58	1.9	350	30	300(79.3)	150(39.6)
HS-1712	1225(48.23)	970(38.19)	85(3.35)	165.2(6.50)	196(7.72)	2"	1-1/2"	58	1.9	600	40	400(105.7)	200(52.8)
HS-1716	1725(67.91)	1470(57.87)	85(3.35)	165.2(6.50)	196(7.72)	2"	1-1/2"	58	2.8	800	50	400(105.7)	200(52.8)
HS-1720	2140(84.25)	1890(74.41)	85(3.35)	165.2(6.50)	196(7.72)	2"	1-1/2"	58	3.5	1000	60	400(105.7)	200(52.8)
HS-1724	2520(99.21)	2270(89.37)	85(3.35)	165.2(6.50)	196(7.72)	2"	1-1/2"	58	4.2	1200	70	400(105.7)	200(52.8)